**ACURA B18A/B** 




## **BC0022**

Engine:	ACURA B18A/B	
Advertised Duration:	INT 300°	<b>ехн</b> 300°
Duration @ .050":	222°	220°
Valve Lift (inches):	.423"	.413"
Valve Lift (mm):	10.74	10.49
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring:

**BC1020** 

For best results, install straight up at 0 intake  $\!\!/$  0 exhaust and tune from there with adjustable cam sprockets if applicable.

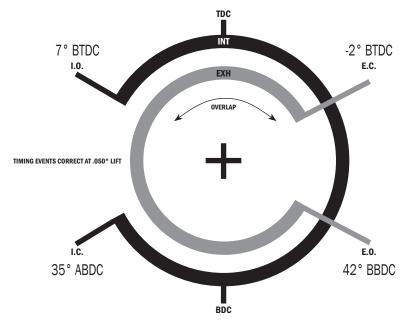

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.





Fngine:


## **BC0022**

Addita Bloky B	
int 300°	<u>ехн</u> 300°
222°	220°
.423"	.413"
10.74	10.49
.008"	.010"
	.008"

Recommended Valve Spring:

**BC1020** 

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.

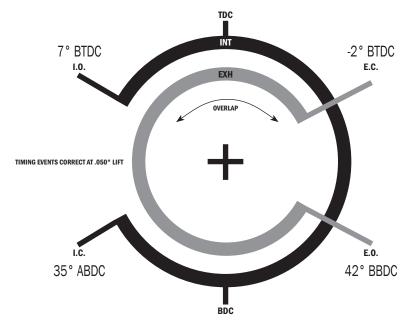

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.

