



CAMSHAFT TIMING TAG


BC0042-2

Engine: 8620 STEEL HONDA K20A2/Z3 iVTEC

	INT	EXH
Advertised Duration:	304°	300°
Duration @ .050" (Lobe):	234°	228°
Duration @ .050" (Valve):	252°	246°
Valve Lift (inches):	.525"	.472"
Valve Lift (mm):	13.34	11.99
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring/Retainer Kit: BC0040

Max cam advance is 50° with 11.7:1 or lower compression.

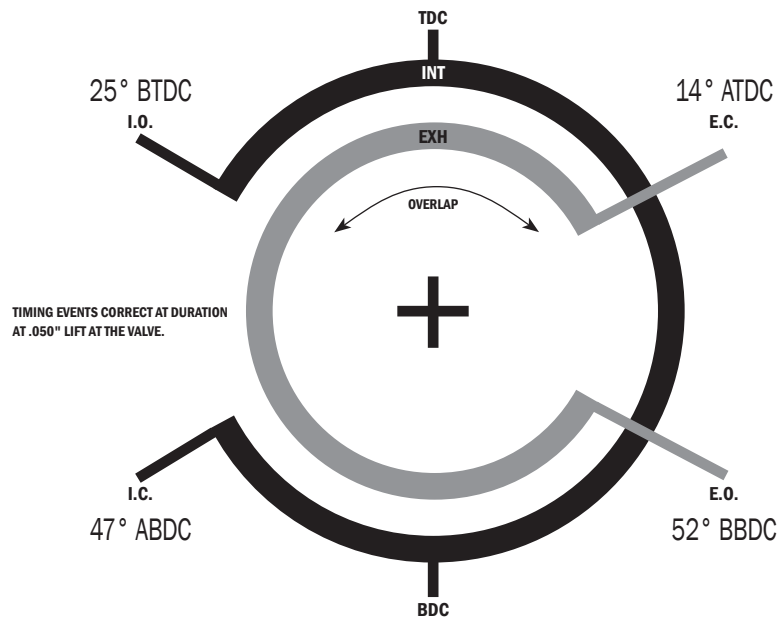

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.



CAMSHAFT TIMING TAG


BC0042-2

Engine: 8620 STEEL HONDA K20A2/Z3 iVTEC

	INT	EXH
Advertised Duration:	304°	300°
Duration @ .050" (Lobe):	234°	228°
Duration @ .050" (Valve):	252°	246°
Valve Lift (inches):	.525"	.472"
Valve Lift (mm):	13.34	11.99
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring/Retainer Kit: BC0040

Max cam advance is 50° with 11.7:1 or lower compression.

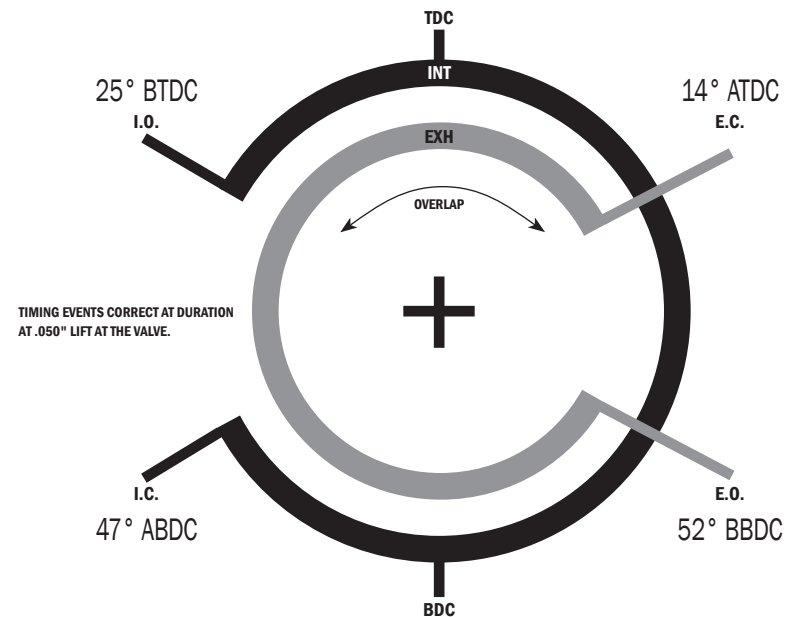

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.