

## **BC0101**


Engine: MITSUBISHI 4G63 ECLIPSE

Advertised Duration:	int 268°	<u>ехн</u> 272°
Duration @ .050":	208°	212°
Valve Lift (inches):	.401"	.381"
Valve Lift (mm):	10.18	9.66
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring:

**BC1100** 

For best results, install straight up at 0 intake  $\!\!/$  0 exhaust and tune from there with adjustable cam sprockets if applicable.

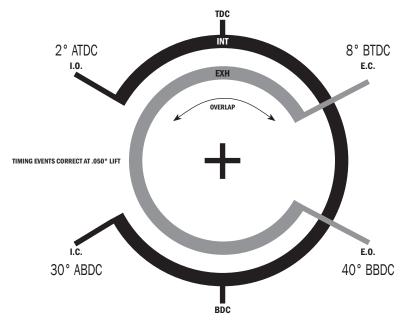

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles. 03-06-12





## **BC0101**


Engine: MITSUBISHI 4G63 ECLIPSE

Advertised Duration:	<u>int</u> 268°	<u>ехн</u> 272°
Duration @ .050":	208°	212°
Valve Lift (inches):	.401"	.381"
Valve Lift (mm):	10.18	9.66
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring:

**BC1100** 

For best results, install straight up at 0 intake  $\!\!/$  0 exhaust and tune from there with adjustable cam sprockets if applicable.

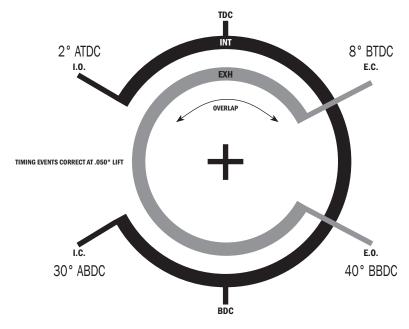

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles. 03-06-12

