MITSUBISHI/DSM 420A

.000"

MITSUBISHI/DSM 420A



Engine:

Valve Lift (mm):

Valve Lash (inches):

BC0167

	<u>INT</u>	EXH
Advertised Duration:	268°	268°
Duration @ .050":	210°	210°
Valve Lift (inches):	.354"	.386"


Recommended Valve Spring/Retainer Kit:

BC0160

9.80

.000"

For best results, install straight up at 0 intake $\!\!/$ 0 exhaust and tune from there with adjustable cam sprockets if applicable.

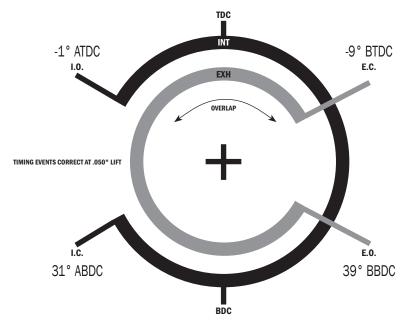

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.





Engine:


BC0167

Advertised Duration:	<u>int</u> 268°	<u>ехн</u> 268°	
Duration @ .050":	210°	210°	
Valve Lift (inches):	.354"	.386	
Valve Lift (mm):	8.99	9.80	
Valve Lash (inches):	.000"	.000	

Recommended Valve Spring/Retainer Kit:

BC0160

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.

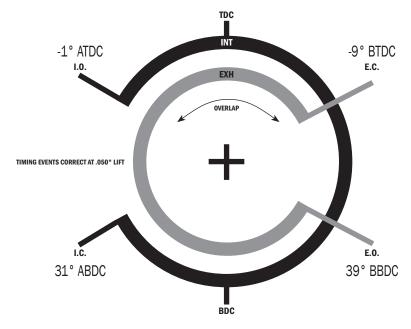

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.

