



CAMSHAFT TIMING TAG


BC0212

Engine: **NISSAN KA24DE (RWD)**

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050":	226°	226°
Valve Lift (inches):	.401"	.401"
Valve Lift (mm):	10.19	10.19
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring: **BC0210**

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.

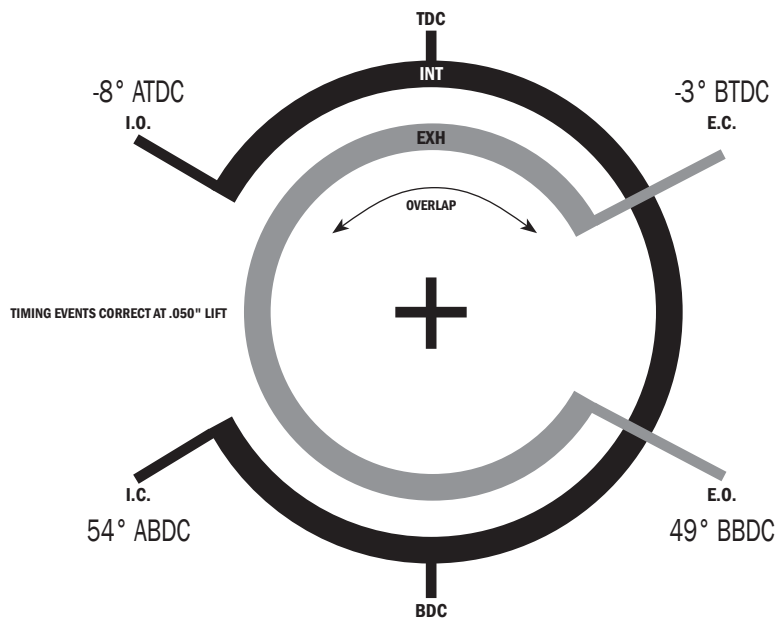

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles. Mild clearancing required on the cylinder head to avoid cam lobe interference.



CAMSHAFT TIMING TAG


BC0212

Engine: **NISSAN KA24DE (RWD)**

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050":	226°	226°
Valve Lift (inches):	.401"	.401"
Valve Lift (mm):	10.19	10.19
Valve Lash (inches):	.008"	.010"

Recommended Valve Spring: **BC0210**

For best results, install straight up at 0 intake / 0 exhaust and tune from there with adjustable cam sprockets if applicable.

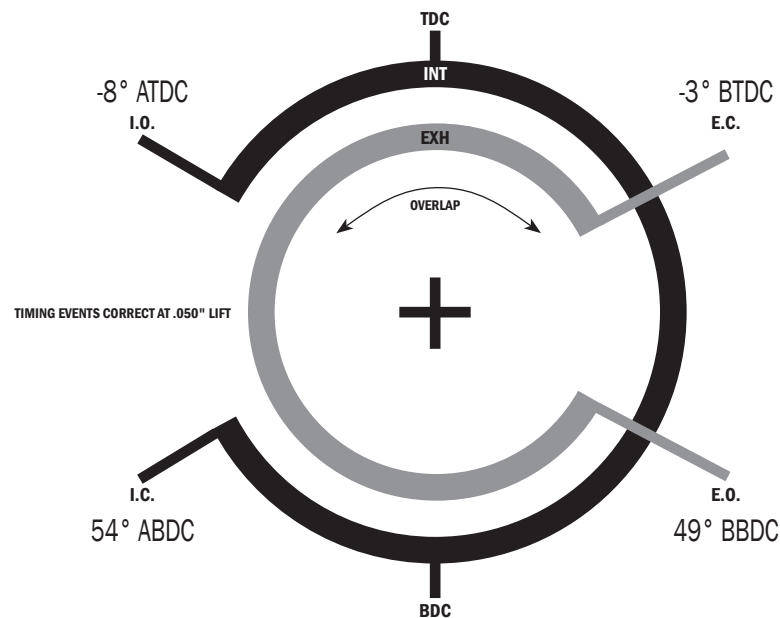

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles. Mild clearancing required on the cylinder head to avoid cam lobe interference.