

BC0221

Engine: NISSAN VQ35DE (Non Rev-Up)


Advertised Duration:	<u>int</u> 264°	<u>ехн</u> 264°
Duration @ .050":	222°	222°
Valve Lift (inches):	.426"	.426"
Valve Lift (mm):	10.82	10.82
Valve Lash (inches):	.010"	.012"

Recommended Valve Spring:

BC1220

Lobe Center:

Intake: 125° / Exhaust: 112°

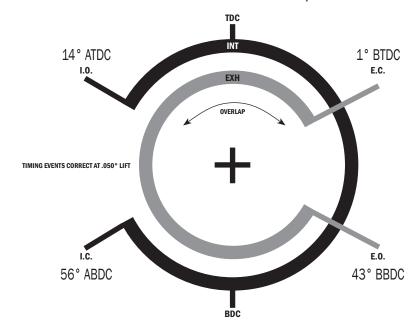

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.





BC0221

Engine:	NISSAN VQ35DE	(Non Rev-Un)
LIIGIIIO.	INDOUGH I GOODE	(IIVIIIIVI OD)


Advertised Duration:	<u>int</u> 264°	<u>ехн</u> 264°
Duration @ .050":	222°	222°
Valve Lift (inches):	.426"	.426"
Valve Lift (mm):	10.82	10.82
Valve Lash (inches):	.010"	.012"

Recommended Valve Spring:

BC1220

Lobe Center:

Intake: 125° / Exhaust: 112°

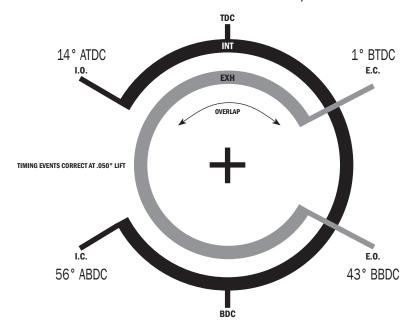

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.

