


	INTAKE	EXHAUST
ADVERTISED DURATION	298°	298°
ACTUAL CAM LIFT (in/mm)	.382" / 9.70mm	.382" / 9.70mm
ROCKER ARM RATIO	1.4:1	1.4:1
VALVE LIFT (in/mm)	.534" / 13.56mm	.534" / 13.56mm
CENTERLINE	108°	
LOBE SEPERATION	108°	108°
DURATION AT <b>0.050" CAM</b>	258°	258°
VALVE CLEARANCE	.006" / .15mm SOLID	.008" / .20mm SOLID
RECOMMENDED SPRING KIT	CALL	

CAMSHAFT TIMING AT 0.050" VALVE LIFT		OPEN	CLOSES
	INTAKE	17° BTDC	61° ABDC
EXHAUST	61° BBDC	17° ATDC	

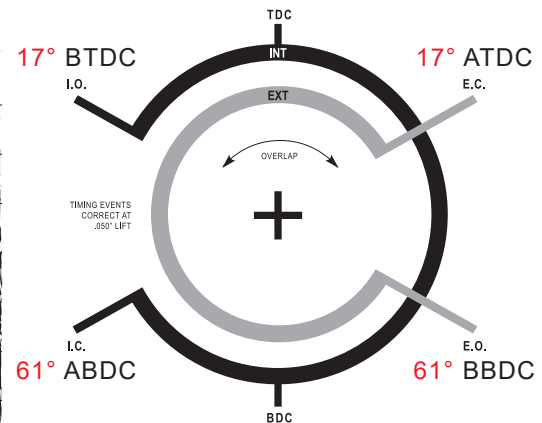

### NOTES

- 3/4 Race Spec
- Normally Aspirated
- Check lifter surfaces prior to operation. If showing signs of wear, replace with aftermarket lifters.

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

