


	INTAKE	EXHAUST
ADVERTISED DURATION	276°	276°
ACTUAL CAM LIFT (in/mm)	.350" / 8.89mm	.350" / 8.89mm
ROCKER ARM RATIO	1:1	1:1
CENTERLINE	110°	118°
LOBE SEPERATION	114°	
DURATION AT 0.050" CAM	220°	220°
DURATION AT 0.050" VALVE	n/a	n/a
VALVE CLEARANCE	.000" / 0mm HYDRAULIC	.000" / 0mm HYDRAULIC
RECOMMENDED SPRING KIT	BC0930 - Beehive/Titanium Retainer	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN		CLOSES
	INTAKE	4° ATDC	44° ABDC
EXHAUST	44° BBDC	4° BTDC	

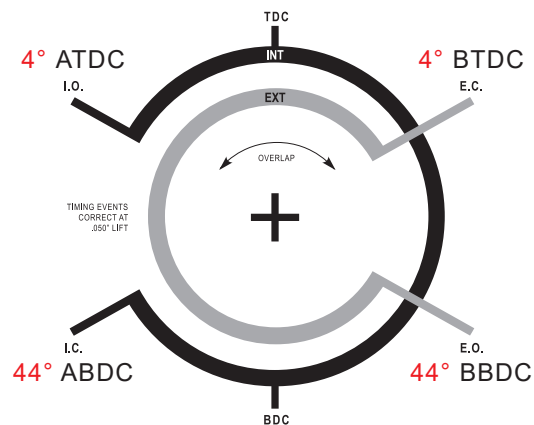

NOTES

STAGE 2 PROFILE

- New, high performance cam cores with stock base circle.
- Factory hydraulic bucket setup.
- Can be used with OEM valve springs/retainers.

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

