HONDA F20C/F22C VTEC



BC0061


Engine: **HONDA F20C/F22C VTEC**

Advertised Duration:	int 310°	<u>ехн</u> 308°
Duration @ .050":	232°	228°
Valve Lift (inches):	.512"	.492"
Valve Lift (mm):	13.00	12.50
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring:

BC1040

No valve timing events available due to variable valve timing. For best results, install straight up and tune accordingly.

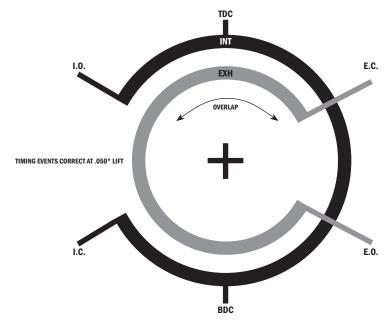

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.





Engine:


BC0061

Advertised Duration:	<u>int</u> 310°	<u>ехн</u> 308°
Duration @ .050":	232°	228°
Valve Lift (inches):	.512"	.492"
Valve Lift (mm):	13.00	12.50
Valve Lash (inches):	.006"	.008"

Recommended Valve Spring:

BC1040

No valve timing events available due to variable valve timing. For best results, install straight up and tune accordingly.

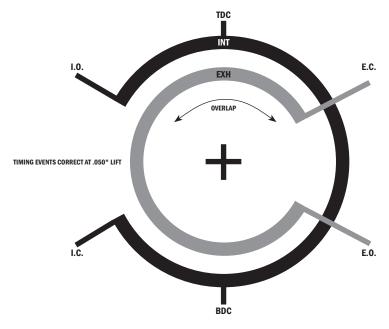

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty.

Not legal for sale or use on emission controlled motor vehicles.

