



CAMSHAFT TIMING TAG


BC0202/BC0206

Engine: NISSAN SR20DE(T) - S13 & S14/S15

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050" at the lobe:	224°	224°
Duration @ .050" at the valve:	234°	234°
Valve Lift (inches):	.494"	.494"
Valve Lift (mm):	12.55	12.55
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring: BC1200

For best results, install straight up at 0 intake / 0 exhaust.
Note: Timing figures below are correct at the valve.

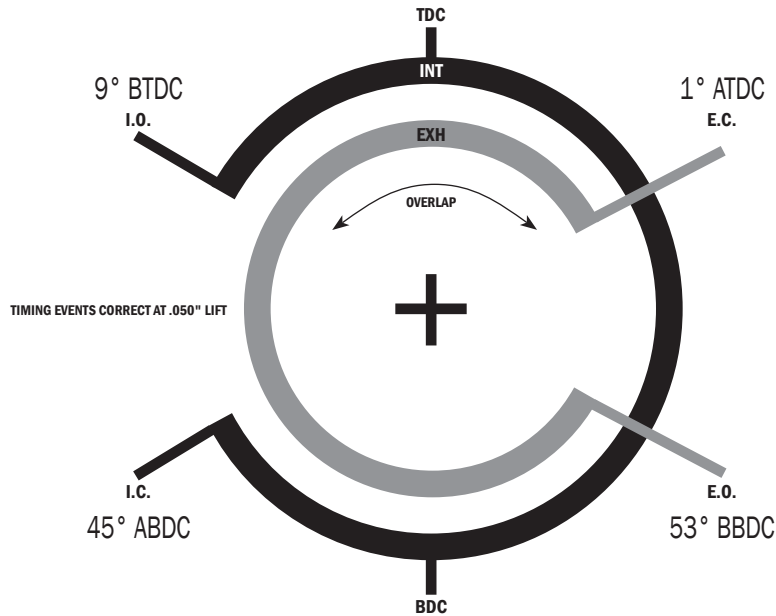

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.



CAMSHAFT TIMING TAG


BC0202/BC0206

Engine: NISSAN SR20DE(T) - S13 & S14/S15

	INT	EXH
Advertised Duration:	272°	272°
Duration @ .050" at the lobe:	224°	224°
Duration @ .050" at the valve:	234°	234°
Valve Lift (inches):	.494"	.494"
Valve Lift (mm):	12.55	12.55
Valve Lash (inches):	.000"	.000"

Recommended Valve Spring: BC1200

For best results, install straight up at 0 intake / 0 exhaust.
Note: Timing figures below are correct at the valve.

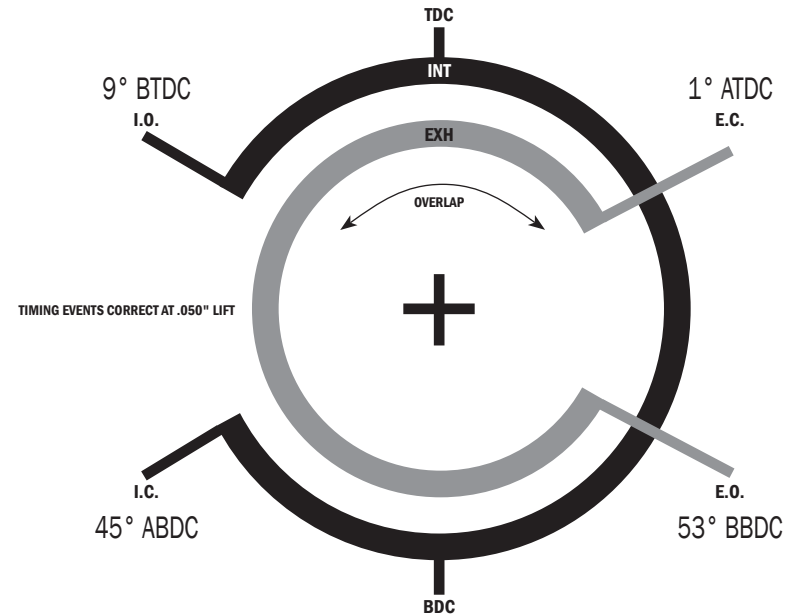

Camshafts damaged by improper installation, excessive spring pressure, valve train bind or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.